

JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
e-mail: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.
JUMO House
Temple Bank, Riverway
Harlow, Essex CM20 2DY, UK
Phone: +44 1279 635533
Fax: +44 1279 635262
e-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
8 Technology Boulevard
Canastota, NY 13032, USA
Phone: 315-697-JUMO
1-800-554-JUMO
Fax: 315-697-5867
e-mail: info@jumo.us
Internet: www.jumo.us



Push-in thermocouples with terminal head form A


- For temperatures from -200 to +1600 °C
- With thermowells made of various materials
- As single or double thermocouple
- Available with transmitter

Push-in thermocouples are preferentially used for measuring temperatures in liquids and gases. The application areas are, among others, in the HVAC, kiln and apparatus engineering sector.

The connection head form A is suitable for ambient temperatures up to +100 °C. The support tube is made of steel. When using a counter flange, see data sheet 90.9750 (90.9725), the installation point can be sealed up to 1 bar.

Sheaths made of various ceramic materials and heat resistant steels protect the measuring insert against chemical influences and mechanical damage. The selection of a suitable sheath material depends on the conditions on site.

Thermocouples (elements) as per DIN EN 60584 and DIN 43710, class 2, are set into the measuring insert. Versions with two thermocouples are also possible.

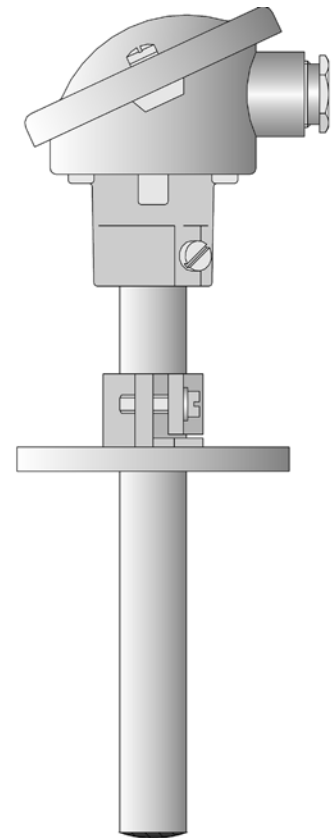

Technical data

Terminal head

Form A DIN 43729, die-cast aluminum, M 20x1.5; IP54, ambient temperature -40 to +100 °C
Caution: reduced ambient temperature when using connection head transmitters, data sheets 70.7010 and 70.7060

Process connection

Sheath screw-connection G 1
Stop flange Ø 22 mm, DIN 43734
Stop flange Ø 32 mm, DIN 43734

Sheath

Steel 1.4749, Ø 22 mm, operating temperature up to +1150 °C (seamless)
Steel 1.4841, Ø 22 mm, operating temperature up to +1150 °C (seamless)
Ceramic C 610 (KER 610), Ø 15 mm, Ø 24 mm, operating temperatures up to +1300 °C
Ceramic C 799 (KER 710), Ø 15 mm, Ø 24 mm, operating temperatures up to +1600 °C

Measuring insert

Insulated structure:
1x Fe-CuNi „J“, DIN EN 60584, cl. 2, operating temperature -200 to +600 °C
1x Fe-CuNi „L“, DIN 43710, cl. 2, operating temperature -200 to +600 °C
1x NiCr-Ni „K“, DIN EN 60584, cl. 2, operating temperature -200 to +1200 °C
1x Pt10Rh-Pt „S“, DIN EN 60584, cl. 2, operating temperature 0 to 1300 °C
1x Pt30Rh-Pt6Rh „B“, DIN EN 60584, cl. 2, operating temperature 600 to 1600 °C
2x Fe-CuNi „J“, DIN EN 60584, cl. 2, operating temperature -200 to +600 °C
2x Fe-CuNi „L“, DIN 43710, cl. 2, operating temperature -200 to +600 °C
2x NiCr-Ni „K“, DIN EN 60584, cl. 2, operating temperature -200 to +1200 °C
2x Pt10Rh-Pt „S“, DIN EN 60584, cl. 2, operating temperature 0 to 1300 °C
2x Pt30Rh-Pt6Rh „B“, DIN EN 60584, cl. 2, operating temperature 600 to 1600 °C

Transmitter

Programmable transmitter, 4 to 20 mA/20 to 4 mA output, data sheet 70.7010
Wtrans B programmable head transducer with radio transmission, data sheet 70.7060 (suitable Wtrans receivers, data sheet 90.2931)


JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
e-mail: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.
JUMO House
Temple Bank, Riverway
Harlow, Essex CM20 2DY, UK
Phone: +44 1279 635533
Fax: +44 1279 635262
e-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk


JUMO Process Control, Inc.
8 Technology Boulevard
Canastota, NY 13032, USA
Phone: 315-697-JUMO
1-800-554-JUMO
Fax: 315-697-5867
e-mail: info@jumo.us
Internet: www.jumo.us



Dimensions

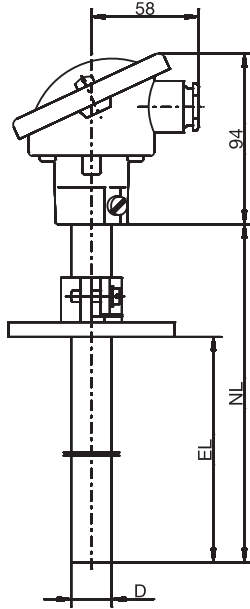

Basic type 901110/10

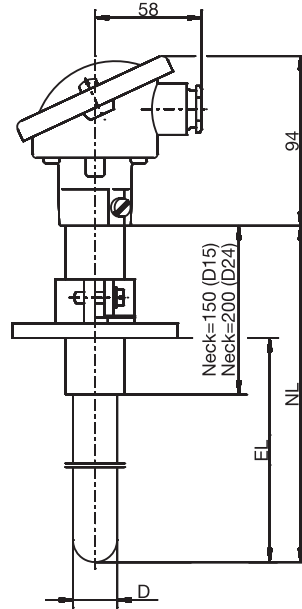

Basic type 901110/20

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us




Order specifications: Push-in thermocouples with form A connection head

(1) Basic type

901110/10	Push-in thermocouple with continuous sheath made of heat resistant steel
-----------	--



901110/20	Push-in thermocouple with stepped sheath made of ceramic
-----------	--



(2) Measuring insert / operating temperature in °C

x	1040	1x Fe-CuNi „J“, operating temperature -200 to +600 °C
x	1042	1x Fe-CuNi „L“, operating temperature -200 to +600 °C
x x	1043	1x NiCr-Ni „K“, operating temperature -200 to +1200 °C
x	1044	1x Pt10Rh-Pt „S“, operating temperature 0 to 1300 °C
x	1046	1x Pt30Rh-Pt 6 Rh „B“, operating temperature 600 to 1600 °C
x	2040	2x Fe-CuNi „J“, operating temperature -200 to +600 °C
x	2042	2x Fe-CuNi „L“, operating temperature -200 to +600 °C
x x	2043	2x NiCr-Ni „K“, operating temperature -200 to +1200 °C
x	2044	2x Pt10Rh-Pt „S“, operating temperature 0 to 1300 °C
x	2046	2x Pt30Rh-Pt 6 Rh „B“, operating temperature 600 to 1600 °C

(3) Sheath diameter D in mm

x	15	Ø 15 mm (support tube Ø 22 mm)
x	22	Ø 22 mm
x	24	Ø 24 mm (support tube Ø 32 mm)

(4) Nominal length NL in mm (180 ≤ NL ≤ 1400)

x x	500	500 mm, fitting length (EL) 100 to 460 mm
x x	710	710 mm, fitting length (EL) 100 to 670 mm
x x	1000	1000 mm, fitting length (EL) 100 to 960 mm
x x	1400	1400 mm, fitting length (EL) 100 to 1360 mm
x x	...	Specification in plain text (100 mm steps)

(5) Process connection

x x	000	None
x	256	Sheath screw-connection G 1 (for a 22 mm diameter only), steel
x x	669	Stop flange Ø 22 mm, DIN 43734
x	671	Stop flange Ø 32 mm, DIN 43734

(6) Sheath material

x	27	Steel X 18 CrNi 28 Mat. No. 1.4749 (operating temperature up to +1150 °C)
x	28	Steel X 15 CrNiSi 25 20 Mat. No. 1.4841 (operating temperature up to +1150 °C)
x	93	Ceramic C 610 (KER 610) (operating temperature up to +1300 °C)
x	94	Ceramic C 799 (KER 710) (operating temperature up to +1600 °C)

(7) Extra codes

x x	000	None
x x	331	1x transmitter programmable output 4 to 20 mA/20 to 4 mA ¹ , data sheet 70.7010
x x	859	1x Wtrans B programmable head transducer with radio transmission, data sheet 70.7060

Order code	(1)	-	(2)	-	(3)	-	(4)	-	(5)	-	(6)	/	(7)
Order example	901110/10	-	1042	-	22	-	710	-	669	-	27	/	000

¹ Specify measuring range and output signal in plain text.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Stock versions

(1)	(2)	(3)	(4)	(5)	(6)	(7)	Sales No.:
901110/10	- 1043	- 22	- 500	- 669	- 27	/ 000	90/00054836
901110/10	- 1043	- 22	- 710	- 669	- 27	/ 000	90/00054837
901110/10	- 1043	- 22	- 1000	- 669	- 27	/ 000	90/00054838
901110/10	- 2043	- 22	- 710	- 669	- 27	/ 000	90/00054842
901110/20	- 1043	- 15	- 500	- 669	- 93	/ 000	90/00054846

Accessories for programmable 2-wire transmitter type 707010 in the accessories data sheet 70.9770

Part	Sales No.:
PC interface with TTL/RS232 converter and adapter (socket connector)	70/00350260
PC interface with USB/TTL converter, adapter (socket connector) and adapter (pins)	70/00456352
Special programming (standard measuring range 0 to 100 °C)	-
Setup program on CD-ROM, multilingual	70/00378733

Accessories for Wtrans B, programmable head transmitter with radio transmission Type 707060

Part	Sales No.:
Lithium battery 3.6 V, 2.2 Ah (size AA)	70/00547559
PC interface with USB/TTL converter, adapter (socket) and adapter (pins)	70/00456352
PC interface with TTL/RS232 converter and adapter (socket connector)	70/00350260
Setup program on CD-ROM, multilingual	70/00488887
Setup program including OnlineChart on CD-ROM, multilingual	70/00549067
OnlineChart activation	70/00549188

JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
e-mail: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.
JUMO House
Temple Bank, Riverway
Harlow, Essex CM20 2DY, UK
Phone: +44 1279 635533
Fax: +44 1279 635262
e-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
8 Technology Boulevard
Canastota, NY 13032, USA
Phone: 315-697-JUMO
1-800-554-JUMO
Fax: 315-697-5867
e-mail: info@jumo.us
Internet: www.jumo.us



Push-in thermocouples with connection head form B


- For temperatures from -200 to +1600 °C
- With thermowells made of various materials
- As single or double thermocouple
- Connection head form B, BUZ, BUZH, BBK
- Available with transmitter

Push-in thermocouples are preferentially used for measuring temperatures in liquids and gases. The application areas are, among others, in the HVAC, kiln and apparatus engineering sector.

The connection head form B is suitable for ambient temperatures up to +100 °C. The support tube is made of steel. When using a counter flange, see data sheet 90.9750 (90.9725), the installation point can be sealed up to 1 bar.

Sheaths made of various materials protect the measuring insert against chemical influences and mechanical damage. The selection of a suitable sheath material depends on the conditions on site.

Thermocouples (elements) as per DIN EN 60584 and DIN 43710, class 2, are set into the measuring insert. Versions with two thermocouples are also possible.

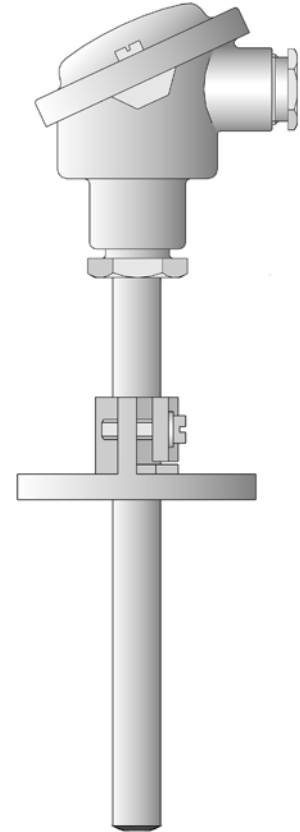

Technical data

Terminal head

Form B DIN 43729, die-cast aluminum, M 20x1.5; IP65, ambient temperature -40 to +100 °C
Form BUZ, die-cast aluminum, M 20x1.5; IP65, ambient temperature -40 to +100 °C
Form BUZH, die-cast aluminum, M 20x1.5; IP65, ambient temperature -40 to +100 °C
Form BBK, plastic, M 20x1.5; IP54, ambient temperature -30 to +130 °C
Caution: reduced ambient temperature range when using connection head transmitters, data sheets 70.7010 and 70.7060

Process connection

Sheath screw-connection G 1/2
Stop flange Ø 15 mm, DIN 43734

Sheath

Steel 1.4749, Ø 15 mm, operating temperature up to +1150 °C (seamless)
Steel 1.4841, Ø 15 mm, operating temperature up to +1150 °C (seamless)
Ceramic C 799 (KER 710), Ø 6 mm, Ø 8 mm, Ø 10 mm, operating temperatures up to +1600 °C

Measuring insert

Insulated structure:
1x Fe-CuNi „J“, DIN EN 60584, cl. 2, operating temperature -200 to +600 °C
1x Fe-CuNi „L“, DIN 43710, cl. 2, operating temperature -200 to +600 °C
1x NiCr-Ni „K“, DIN EN 60584, cl. 2, operating temperature -200 to +1200 °C
1x Pt10Rh-Pt „S“, DIN EN 60584, cl. 2, operating temperature 0 to 1300 °C
1x Pt30Rh-Pt6Rh „B“, DIN EN 60584, cl. 2, operating temperature 600 to 1600 °C
2x Fe-CuNi „J“, DIN EN 60584, cl. 2, operating temperature -200 to +600 °C
2x Fe-CuNi „L“, DIN 43710, cl. 2, operating temperature -200 to +600 °C
2x NiCr-Ni „K“, DIN EN 60584, cl. 2, operating temperature -200 to +1200 °C
2x Pt10Rh-Pt „S“, DIN EN 60584, cl. 2, operating temperature 0 to 1300 °C
2x Pt30Rh-Pt6Rh „B“, DIN EN 60584, cl. 2, operating temperature 600 to 1600 °C

Transmitter

Programmable transmitter output 4 to 20 mA/20 to 4 mA, data sheet 70.7010
Wtrans B programmable head transducer with radio transmission, data sheet 70.7060 (suitable Wtrans receivers, data sheet 90.2931)


JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
e-mail: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.
JUMO House
Temple Bank, Riverway
Harlow, Essex CM20 2DY, UK
Phone: +44 1279 635533
Fax: +44 1279 635262
e-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk


JUMO Process Control, Inc.
8 Technology Boulevard
Canastota, NY 13032, USA
Phone: 315-697-JUMO
1-800-554-JUMO
Fax: 315-697-5867
e-mail: info@jumo.us
Internet: www.jumo.us



Dimensions

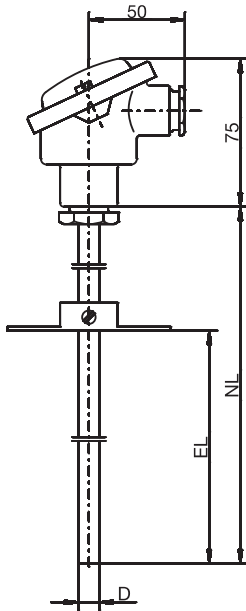

Basic type 901120/10

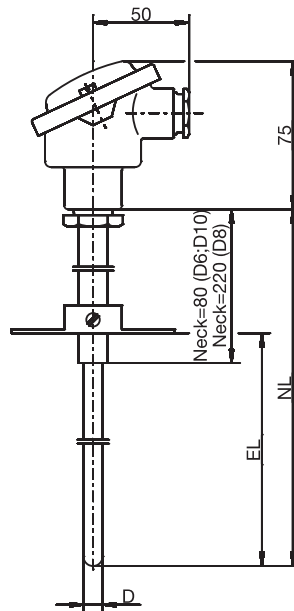

Basic type 901120/20

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us




Order specifications: Push-in thermocouples with form B connection head

(1) Basic type

901120/10	Push-in thermocouple with continuous sheath made of heat resistant steel
-----------	--



901120/20	Push-in thermocouple with stepped sheath made of ceramic
-----------	--



(2) Measuring insert / operating temperature in °C

x	1040	1x Fe-CuNi „J“, operating temperature -200 to +600 °C
x	1042	1x Fe-CuNi „L“, operating temperature -200 to +600 °C
x	1043	1x NiCr-Ni „K“, operating temperature -200 to +1200 °C
x	1044	1x Pt10Rh-Pt „S“, operating temperature 0 to 1300 °C
x	1046	1x Pt30Rh-Pt 6 Rh „B“, operating temperature 600 to 1600 °C
x	2040	2x Fe-CuNi „J“, operating temperature -200 to +600 °C
x	2042	2x Fe-CuNi „L“, operating temperature -200 to +600 °C
x	2043	2x NiCr-Ni „K“, operating temperature -200 to +1200 °C
x	2044	2x Pt10Rh-Pt „S“, operating temperature 0 to 1300 °C
x	2046	2x Pt30Rh-Pt 6 Rh „B“, operating temperature 600 to 1600 °C

(3) Sheath diameter D in mm

x	6	Ø 6 mm (support tube Ø 15 mm)
x	8	Ø 8 mm (support tube Ø 15 mm)
x	10	Ø 10 mm (support tube Ø 15 mm)
x	15	Ø 15 mm

(4) Nominal length NL in mm (180 ≤ NL ≤ 1200, NL ≤ 1000 for type 901120/20)

x	180	180 mm, fitting length (EL) 100 to 140 mm
x	250	250 mm, fitting length (EL) 100 to 210 mm
x	355	355 mm, fitting length (EL) 100 to 315 mm
x	500	500 mm, fitting length (EL) 100 to 460 mm
x	710	710 mm, fitting length (EL) 100 to 670 mm, for Ø 8 mm only
x	1000	1000 mm, fitting length (EL) 100 to 960 mm, for Ø 8 mm only
x	...	Specification in plain text (50 mm steps)

(5) Process connection

x	x	000	None
x	x	254	Sheath screw-connection G 1/2
x	x	668	Stop flange Ø 15 mm, DIN 43734

(6) Sheathmaterial

x	27	Steel X 18 CrNi 28 Mat. No. 1.4749 (operating temperature up to +1150 °C)
x	28	Steel X 15 CrNiSi 25 20 Mat. No. 1.4841 (operating temperature up to +1150 °C)
x	94	Ceramic C 799 (KER 710) (operating temperature up to +1600 °C)

(7) Extra codes

x	x	000	None
x	x	320	terminal head Form BUZ
x	x	321	terminal head Form BUZH
x	x	322	Connection head form BBK
x	x	331	1x transmitter programmable output 4 to 20 mA/20 to 4 mA ² , data sheet 70.7010
x	x	335	2x transmitter programmable output 4 to 20 mA/20 to 4 mA ² , data sheet 70.7010
x	x	859	1x Wtrans B head transducer with radio transmission, data sheet 70.7060

Order code	(1)	(2)	(3)	(4)	(5)	(6)	(7)	...						
Order example	901120/10	-	1042	-	15	-	250	-	668	-	27	/	000	...

¹ List extra codes in sequence, separated by commas.
² Specify measuring range and output signal in plain text.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Stock version

(1) 901120/10 - (2) 1043 - (3) 15 - (4) 500 - (5) 668 - (6) 27 / (7) 000 Sales No.: 90/00054589

Accessories for programmable 2-wire transmitter type 707010 in the accessories data sheet 70.9770

Part	Sales No.:
PC interface with TTL/RS232 converter and adapter (socket connector)	70/00350260
PC interface with USB/TTL converter, adapter (socket connector) and adapter (pins)	70/00456352
Special programming (standard measuring range 0 to 100 °C)	-
Setup program on CD-ROM, multilingual	70/00378733

Accessories for Wtrans B, programmable head transmitter with radio transmission Type 707060

Part	Sales No.:
Lithium battery 3.6 V, 2.2 Ah (size AA)	70/00547559
PC interface with USB/TTL converter, adapter (socket) and adapter (pins)	70/00456352
PC interface with TTL/RS232 converter and adapter (socket connector)	70/00350260
Setup program on CD-ROM, multilingual	70/00488887
Setup program including OnlineChart on CD-ROM, multilingual	70/00549067
OnlineChart activation	70/00549188